



Airglide conveyors

For gentle and dust-free transport of bulk materials over long conveying distances

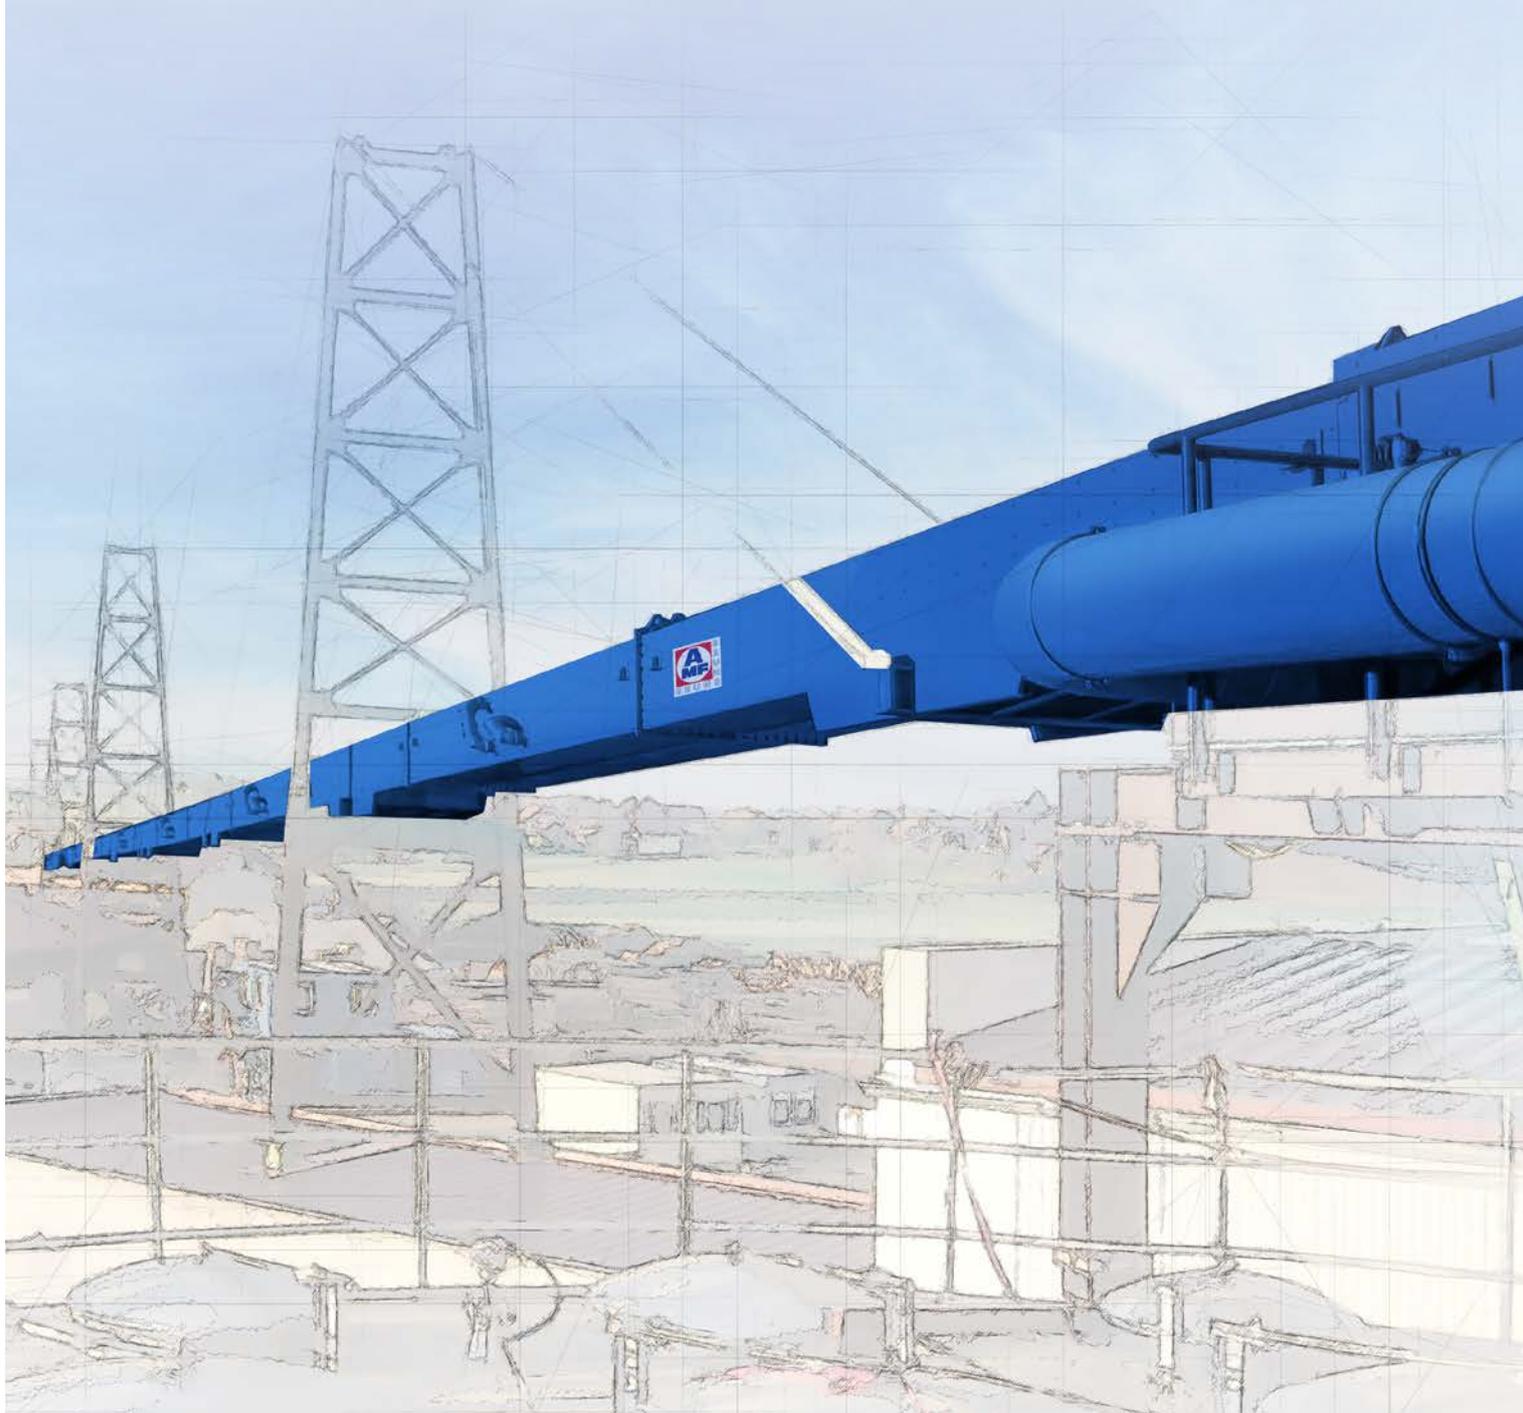

CONVEYORS
INDUSTRIAL SOLUTIONS

www.amf-bruns.com

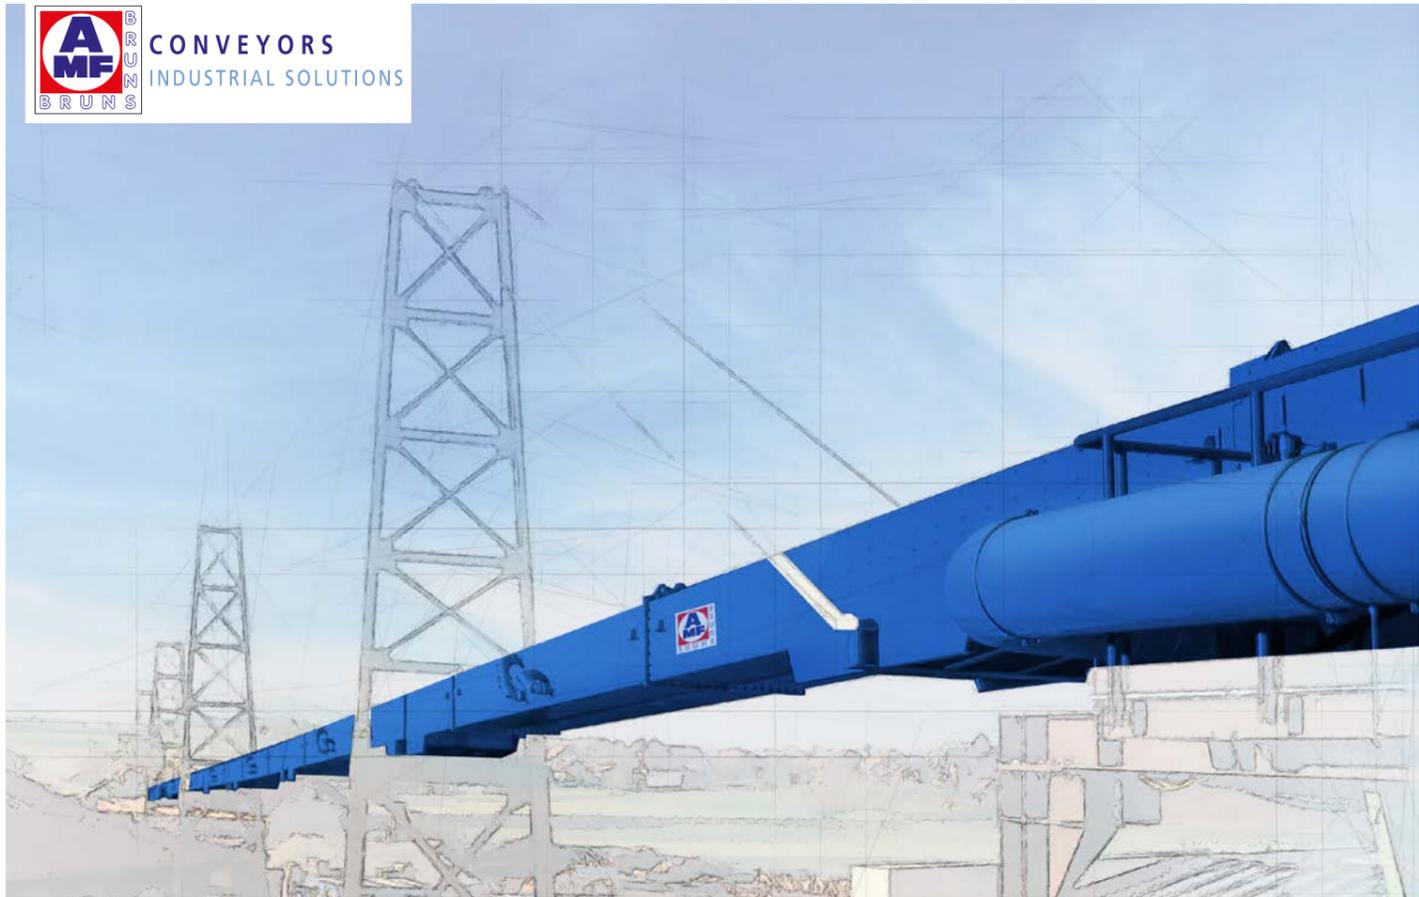

Airslide conveyors LGF 500 to LGF 1400

Technical data

| | |
|----------------------------|---|
| Sizes: | from 500 mm to 1,400 mm belt width |
| Conveyor lengths: | from 40 m to 250 m |
| Cantilever length: | up to 24 m |
| Conveying power: | 230 m ³ /h to 1,700 m ³ /h (plus 25% reserve) |
| Conveying speed: | 1 m/s to 3 m/s |
| Other: | special cleaning system in the transfer area/elevation of the system from 0° to 10° / use of sliding belts/radial fan provides pneumatic support for upper and lower belt/ split plummer block housings with rolling bearings |
| Additional options: | ATEX design |

Airslide conveyors LGF


For long conveying distances

Typical products conveyed:

flakes, wood chips, OSB-Strands, fuel material,
recycling chips, crushed bark

Conveying speeds:

up to max. 3 m/s

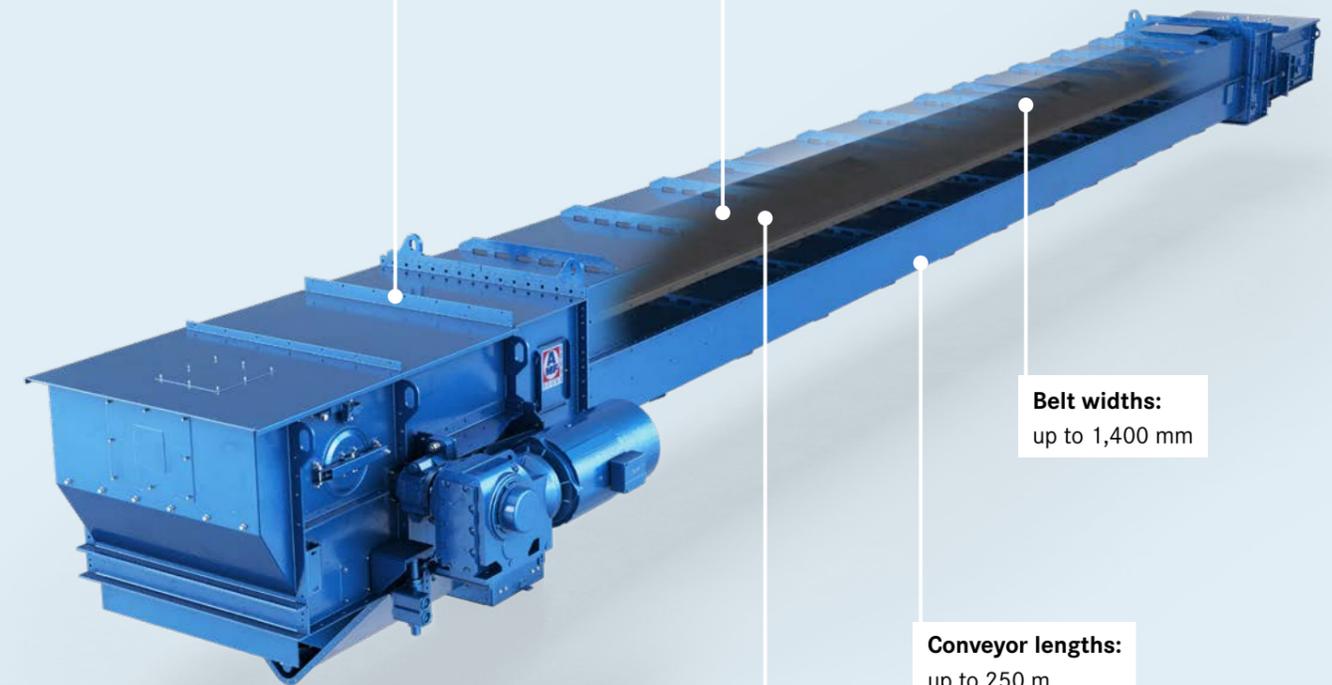

Belt widths:
up to 1,400 mm

Conveyor lengths:
up to 250 m

Belt qualities:

oil & grease resistant,
as sliding belt with fabric bottom

The benefits of AMF-Bruns airslide conveyors:

- dust-free and low-noise operation
- low maintenance costs
- large distances between supports can be implemented
- belt protection thanks to optimized troughing
- optional ATEX design
- no platforms necessary
- optional reversible design



Please feel free to contact us.



AMF-Bruns GmbH & Co. KG · Hauptstraße 101 · 26689 Apen · Germany
 Phone: +49 (0)44 89 - 72 7100 · info@amf-bruns.de
 www.amf-bruns.com